


ENCOREPRO 540

Switch your style

Experience our lightest ever series of professional corded headsets with the new HW540. Its unique, convertible design offers users a choice of three different wearing styles for additional all-day comfort. At the same time, it gives your organisation the flexibility to stock just one model for your entire operation, simplifying headset management. Plus, with wideband audio built in from the ground up, and a great noise-cancelling microphone, you can expect leading call clarity at a time when all the focus needs to be on dealing with longer, more complex queries.

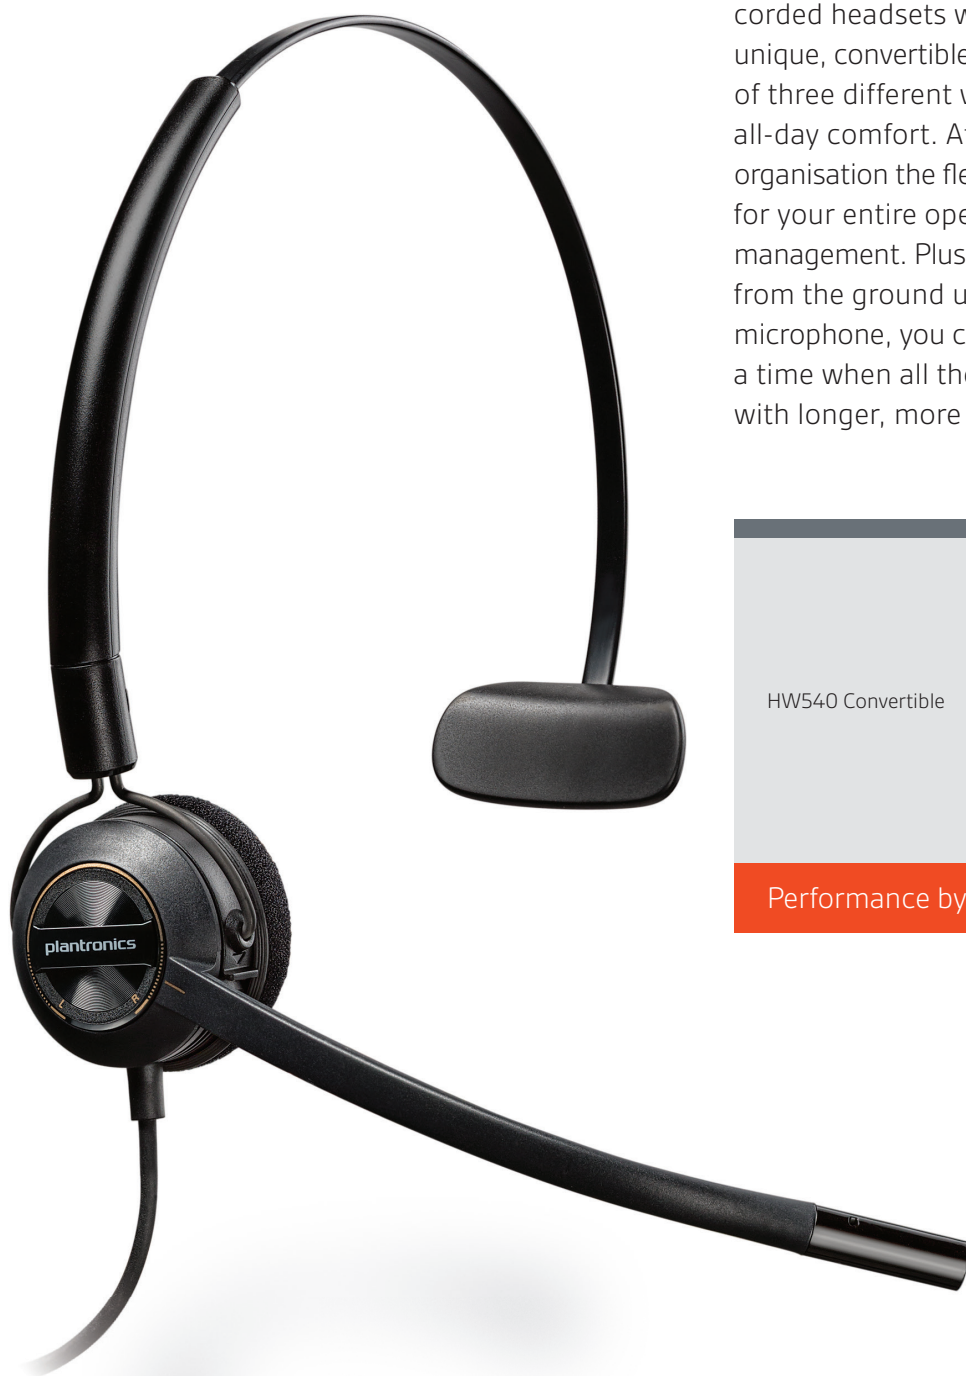

HW540 Convertible



Performance by design



ENCOREPRO 540

KEY FEATURES

- Choice of three comfortable and easily switchable wearing styles – over-the-ear, over-the-head or behind-the-neck – offers more flexibility from a single headset to suit a wider range of user preferences
- The new design is extremely light, offering users a more discrete headset and improved comfort for longer calls
- Soft, luxurious ear cushions for excellent audio quality, while providing all day comfort
- Visible guidance so the user can see when the boom is moved into the proper range for optimum microphone positioning
- Higher-quality wideband audio meets official TIA920A standards and noise-cancelling microphone help raise the standard of phone conversations
- Quick Disconnect supports multiple connectivities from USB, audio processor or Direct Connect and allows users to easily move away from their workspaces without removing their headsets

HW540

- Three-way convertibility for choice of wearing styles
- Soft, luxurious ear cushions for all-day comfort
- Visual feedback on microphone positioning
- Wideband audio for higher quality calls
- 2 year warranty



Performance by design



Connects to	PC or deskphone with Plantronics audio processors
Ideal for	Telephone intensive users, informal contact centres (e.g. helpdesks) and enterprise/office telephony users
Audio performance	Wideband audio (up to 6,800 Hz), noise-cancelling microphone

Transmit Characteristics (typical)

Sensitivity @ 1kHz:	-39 ± 3 dBV/Pa
Frequency Range:	150 to 6800Hz
Output Impedance:	< 150Ω
Typical Test Conditions:	1.8VDC, 3.3KΩ DC Resis, 3.3KΩ AC Load

Receive Characteristics (typical)

Frequency Range:	100 to 6800Hz
Acoustic Limit:	<24dBPa (<118SPL)
Input Impedance:	150Ω ± 25%
Typical Test Conditions:	100mV Drive, 10Ω Source Impedance. Measured on ITU-T Type 3.3 artificial ear, Ear Reference Point

Headset	Model	Weight	Part number
HW540 EMEA	Convertible, Noise-cancelling	32g	88828-02

For more information about the HW540 or other products, please visit our website at plantronics.com.

GLOBAL SERVICE AND SUPPORT

Backed by Plantronics industry-leading global service and support.

Plantronics Ltd, Royal Wootton Bassett, UK, 0800 410014 or +44 (0)1793 842200

Connect with Plantronics

